



Modular Cooking Range Line 700XP Freestanding Gas Boiling Pan 60lt indirect heat

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



371269 (E7BSGHINF0)

60-lt indirect gas Boiling Pan
with pressure switch

Short Form Specification

Item No. _____

To be installed on height adjustable feet in stainless steel. Suitable for natural gas or LPG. Robust burners in stainless steel with flame failure device and protected pilot light. Temperature is controlled by a power regulator; heating elements with temperature limiter. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- Kettle is suitable to cook, sauté or poach all kinds of produce.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110° C in the jacket.
- Pressed cooking vessel and lid in 316 AISI Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- Appliance is IPX4 water resistance certified.
- Solenoid valve to refill with hot and cold water.
- Safety valve avoids overpressure of the steam in the jacket.
- No overshooting of cooking temperatures, fast reaction.
- Large capacity drain tap enables precise portioning of the discharged food, especially small quantities.
- Firmly fitting cover to reduce cooking time and save energy costs.
- Ergonomic: unique ratio vessel diameter and height; depth facilitates stirring and gentle food handling.
- Discharge tube and tap are very easy to clean from outside.
- Smooth large surfaces, easy access for cleaning.
- Pressure switch control monitors energy and water consumption.
- Exterior panels in Stainless Steel with Scotch Brite finish.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Unit delivered with four 50 mm legs in stainless steel as standard (all round Stainless steel kick plates as option).

Construction

- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- One piece pressed 1.5 mm work top in Stainless steel.
- Robust burners in stainless steel with flame failure device, protected pilot light and optimized combustion.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- IPx4 water protection.

Sustainability

- Closed heating system – no waste of energy.
- Firmly fitting cover to reduce cooking time and save

APPROVAL: _____



Experience the Excellence
www.electroluxprofessional.com

energy costs.


- Pressure switch control monitors energy and water consumption.

Optional Accessories


- | | | |
|---|------------|--------------------------|
| • Junction sealing kit | PNC 206086 | ☐ |
| • Draught diverter, 150 mm diameter | PNC 206132 | ☐ |
| • Matching ring for flue condenser, 150 mm diameter | PNC 206133 | ☐ |
| • Kit 4 wheels - 2 swivelling with brake - it is mandatory to install Base support and wheels | PNC 206135 | ☐ |
| • Flanged feet kit | PNC 206136 | ☐ |
| • Frontal kicking strip for concrete installation, 400mm | PNC 206147 | ☐ |
| • Frontal kicking strip for concrete installation, 800mm | PNC 206148 | ☐ |
| • Frontal kicking strip for concrete installation, 1000mm | PNC 206150 | ☐ |
| • Frontal kicking strip for concrete installation, 1200mm | PNC 206151 | ☐ |
| • Frontal kicking strip for concrete installation, 1600mm | PNC 206152 | ☐ |
| • Frontal kicking strip, 800mm (not for refr-freezer base) | PNC 206176 | ☐ |
| • Frontal kicking strip, 1000mm (not for refr-freezer base) | PNC 206177 | ☐ |
| • Frontal kicking strip, 1200mm (not for refr-freezer base) | PNC 206178 | ☐ |
| • Frontal kicking strip, 1600mm (not for refr-freezer base) | PNC 206179 | ☐ |
| • Kit 4 feet for concrete installation (not for 900 line free standing grill) | PNC 206210 | ☐ |
| • Flue condenser for 1 module, 150 mm diameter | PNC 206246 | ☐ |
| • Pair of side kicking strips | PNC 206249 | ☐ |
| • Pair of side kicking strips for concrete installation | PNC 206265 | ☐ |
| • Chimney upstand, 800mm | PNC 206304 | ☐ |
| • Right and left side handrails | PNC 206307 | ☐ |
| • Back handrail 800 mm | PNC 206308 | ☐ |
| • Flue condenser for 1/2 module, 120 mm diameter | PNC 206310 | ☐ |
| • Base support for feet or wheels - 400mm (700/900) | PNC 206366 | ☐ |
| • Base support for feet or wheels - 800mm (700/900) | PNC 206367 | ☐ |
| • Base support for feet or wheels - 1200mm (700/900) | PNC 206368 | ☐ |
| • Base support for feet or wheels - 1600mm (700/900) | PNC 206369 | ☐ |
| • Base support for feet or wheels - 2000mm (700/900) | PNC 206370 | ☐ |
| • Rear paneling - 800mm (700/900) | PNC 206374 | ☐ |
| • Rear paneling - 1000mm (700/900) | PNC 206375 | ☐ |
| • Rear paneling - 1200mm (700/900) | PNC 206376 | ☐ |
| • Kit G.25.3 (NI) gas nozzles for 900 boiling pans | PNC 206463 | ☐ |
| • 2 side covering panels for free standing appliances | PNC 216000 | ☐ |
| • Frontal handrail, 800mm | PNC 216047 | ☐ |
| • Frontal handrail, 1200mm | PNC 216049 | ☐ |

- | | | |
|---|------------|--------------------------|
| • Large handrail - portioning shelf, 800mm | PNC 216186 | ☐ |
| • 1-section noodle basket for 60lt boiling pans | PNC 921626 | ☐ |
| • Trolley with lifting & removable tank | PNC 922403 | ☐ |
| • Measuring rod for 60 l Boiling Pan | PNC 927000 | ☐ |
| • Pressure regulator for gas units | PNC 927225 | ☐ |

Front

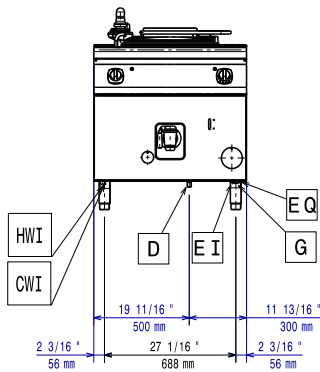


Side

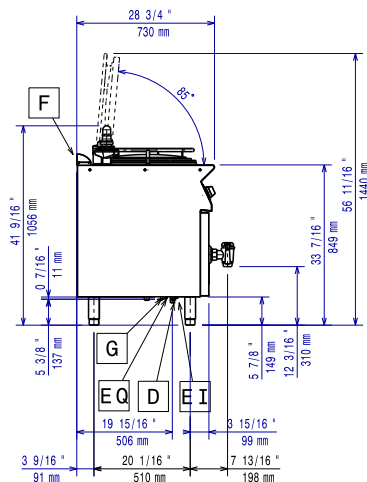

CWI = Cold Water inlet 1 (cleaning) HWI = Hot water inlet
 D = Drain
 EI = Electrical inlet (power)
 G = Gas connection

Top

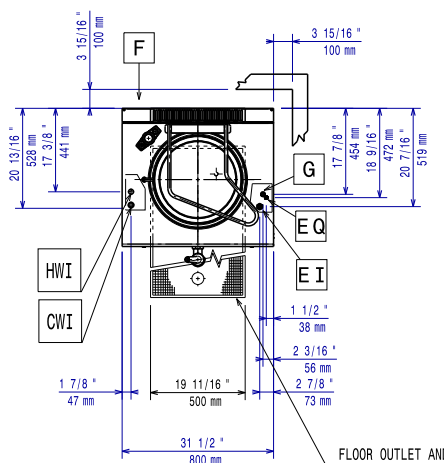

Electric

Supply voltage:

371269 (E7BSGHINF0)

230 V/1N ph/50 Hz

Total Watts:

0.1 kW

Gas

Gas Power:

14 kW

Standard gas delivery:

Natural Gas G20 (20mbar)

Gas Type Option:

LPG

Gas Inlet:

1/2"

Water:

Water drain outlet size:

1 1/2"

Key Information:

Pan useful capacity:

60 lt

Vessel (round) diameter:

420 mm

Net weight:

100 kg

Shipping weight:

100 kg

Shipping height:

1140 mm

Shipping width:

820 mm

Shipping depth:

860 mm

Shipping volume:

0.8 m³

No clearance needed on rear sides of unit if wall is of non combustible type. If wall is combustible, minimum 50 mm wall clearance should be maintained.

Certification group:

N7PG