

Modular Cooking Range Line 700XP Electric Induction Wok HP

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



371282 (E7INEDW00P)

Electric single Induction Wok
(5 kW)

Short Form Specification

Item No.

6 mm thick glass ceramic Wok bowl with 5 kW surface power. Exterior panels in stainless steel with Scotch Brite finish. One piece pressed work top in 1.5 mm thick stainless steel. Right-angled side edges to allow flush-fitting junction between units.

Main Features

- 6mm glass-ceramic cooking surface with a total power of 5 kW.
- Indicating lamp for operating zone located on control console.
- Induction plate endowed with overheating safety device.
- Power to the zone can be set with progressive output i.e. fine regulation at the lower levels and larger progress at the upper levels.
- Low heat dissipation to the kitchen.
- The smooth, glass ceramic plate is not directly heated, so there is no burning on cooking surface.
- Automatic pan detection to transfer power only when pan is present.
- IPx4 water protection.
- Pots diameter to be used : min 12cm, max 28 cm in order to obtain maximum heating efficiency.
- Suitable for countertop installation.

Construction

- All exterior panels in Stainless Steel with Scotch Brite finishing.
- One piece pressed 1.5 mm work top in Stainless steel.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.

Sustainability



- This model is compliant with Swiss Energy Efficiency Ordinance (730.02).


Optional Accessories

- | | | |
|--|------------|--------------------------|
| • Support for bridge type installation, 800mm | PNC 206137 | ☐ |
| • Support for bridge type installation, 1000mm | PNC 206138 | ☐ |
| • Support for bridge type installation, 1200mm | PNC 206139 | ☐ |
| • Support for bridge type installation, 1400mm | PNC 206140 | ☐ |
| • Support for bridge type installation, 1600mm | PNC 206141 | ☐ |
| • Support for bridge type installation, 400mm | PNC 206154 | ☐ |
| • Water column extension for 700 line | PNC 206291 | ☐ |
| • Chimney upstand, 400mm | PNC 206303 | ☐ |
| • Scraper for free standing grills | PNC 206422 | ☐ |
| • 2 side covering panels for top appliances | PNC 216277 | ☐ |
| • Induction Wok pan with wooden handle (diam. 360mm) | PNC 910613 | ☐ |


APPROVAL: _____

- Inducton Wok pan with stainless steel handle (diam. 360mm) PNC 911587 ☐
- Stainless steel lid for Wok pan diam. 360mm PNC 911588 ☐

Front

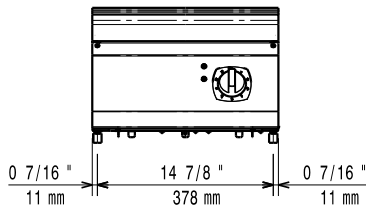


Side

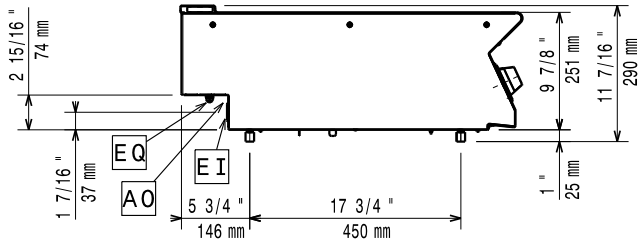

EI = Electrical inlet (power)
 EQ = Equipotential screw

Top

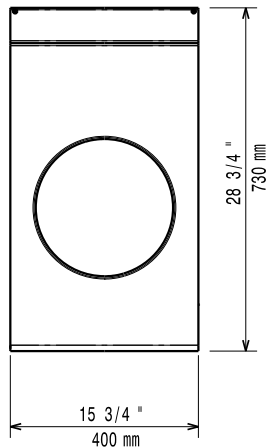

Electric

Supply voltage:

371282 (E7INEDW00P)

380-400 V/3 ph/50/60 Hz

Total Watts:

5 kW

Predisposed for:

380-400V 3~ 50/60Hz
 4.5-5kW

Key Information:

Back Plates Power:

5 - kW

Back Plates dimensions:

Ø 300

External dimensions, Width:

400 mm

External dimensions, Depth:

730 mm

External dimensions, Height:

250 mm

Net weight:

20 kg

Shipping weight:

28 kg

Shipping height:

540 mm

Shipping width:

460 mm

Shipping depth:

820 mm

Shipping volume:

0.2 m³

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.

Induction compatible pots & pans must be used.

Certification group:

N7CIN