

Modular Cooking Range Line 700XP 2 Drawer Refrigerated Base

TEM #	
MODEL #	
NAME #	
SIS #	
AIA#	



371290 (E7TTAECOMIN)

Refrigerated base with 2 drawers, +10-2°C, automatic evaporation of defrost condense - R290

Short Form Specification

Item No.

Refrigerated base with 2 drawers. Built-in refrigerator compressor unit. Operating temperature range from -2°C to 10°C. To be installed below 700XP top units. To be delivered with 50 mm height adjustable feet. Exterior panels in stainless steel with Scotch Brite finish. Suitable to operate with ambient temperature up to +43°C. Constructed to allow flush-fitting junction between units.

Main Features

- Defrosting and automatic evaporation of condense drain: the condense is automatically evaporated thanks to the electric resistance in the condense drain container.
- GN compliant.
- Designed for modular installation into the cooking block.
- Unit can be easily installed below other 700 line top models.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Right angled side edges eliminate gaps and possible dirt traps between units.

Construction

- Exterior panels in Stainless steel with Scotch Brite finish to meet the highest hygiene standards.
- Built-in compressor to suit operating conditions.
- Access to all components from the front.
- Unit delivered with 150 mm height adjustable feet in Stainless steel. Feet can be extended up to 250 mm.

Sustainability

brake



 CFC and HCFC free (highly ecological refrigerant type: R290).

Optional Accessories

 Flanged feet kit 	PNC 206136 🗖
 Frontal kicking strip for concrete installation, 1200mm 	PNC 206151 🗖
 Frontal kicking strip, 1200mm (not for refr-freezer base) 	PNC 206178 🗆
 Kit 4 feet for concrete installation (not for 900 line free standing grill) 	PNC 206210 □
 2 panels for service duct for single "top on base" installation 	PNC 206248 □
 Pair of side kicking strips 	PNC 206249 🗖
 Pair of side kicking strips for concrete installation 	PNC 206265 □
 2 drawers for refrigerated base 	PNC 206351 🗖
 Base support for feet or wheels - 1200mm (700/900) 	PNC 206368 🗖
 Base support for feet or wheels - 1600mm (700/900) 	PNC 206369 🗖
 Rear paneling - 1200mm (700/900) 	PNC 206376 🗖
• Kit 6 wheels - 3 swivelling with	PNC 206432 🗖

APPROVAL:





Modular Cooking Range Line 700XP 2 Drawer Refrigerated Base

• Kit G.25.3 (NI) gas nozzles for 700 and 900 pasta cookers

PNC 206465 📮

• 2 side covering panels for free standing appliances

PNC 216000 🔲














Modular Cooking Range Line 700XP 2 Drawer Refrigerated Base

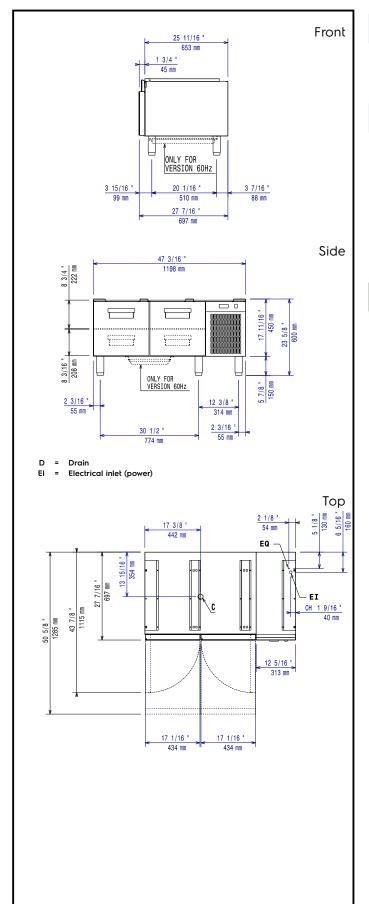

Electric

Supply voltage:

371290 (E7TTAECOMIN) 220-230 V/1N ph/50 Hz

Electrical power max.: 0.4 kW **Total Watts:** 0.4 kW

Key Information:

Gross capacity: 152 lt External dimensions, Width: 1200 mm External dimensions, Depth: 700 mm External dimensions, Height: 600 mm Net weight: 95 kg Shipping weight: 104 kg Shipping height: 780 mm Shipping width: 850 mm Shipping depth: 1300 mm 0.86 m³ Shipping volume:

Sustainability

R290 Refrigerant type: Refrigerant weight: 85 g











