

# Modular Cooking Range Line 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate

ITEM #
MODEL #
NAME #
SIS #
<u> </u>
AIA#



391074 (E9FTEHCP00) Full module electric Fry Top with 2/3 smooth and 1/3 ribbed sloped polished chrome cooking Plate, thermostatic control

391177 (E9FTEHCP0N) Electric Fry Top with 2/3 smooth and 1/3 ribbed sloped polished chrome cooking Plate, thermostatic control

# **Short Form Specification**

## Item No.

2/3 smooth and 1/3 ribbed cooking polished chrome surface. To be installed on open base installations, bridging supports or cantilever systems. Removable drawer below the cooking surface for the collection of grease and fat. Body and work top of unit entirely in stainless steel with Scotch Brite finish. Extra strength work top in heavy duty 2 mm stainless steel. Right-angled side edges to allow flushfitting junction between units.

## **Main Features**

- Unit to be mounted on open base cupboards, bridging supports or cantilever systems.
- Large drain hole on cooking surface permits the draining of fat into large 1 liter collector placed under the cooking surface.
- Electric elements in incoloy positioned under the cooking plate.
- Safety thermostat and thermostatic control.
- Units have separate controls for each half module of the cooking surface.
- Stainless steel high splash guards on the rear and sides of cooking surface. Splash guards can be easily removed for cleaning and are dishwashersafe.
- The special design of the control knob system guarantees against water infiltration.
- IPX5 water protection.
- Temperature range from 120° up to 280°C.
- Cooking surface 15mm thick polished chrome for optimum grilling results and ease of use.
- Polished chromium surface avoids the mixing of flavors when passing from one type of food to another.
- Suitable for countertop installation.

## Construction

- Unit is 930 mm deep to give a larger working surface area.
- All exterior panels in Stainless Steel with Scotch Brite finishing.
- AISI 304 stainless steel worktop, 2mm thick.
- Model has right-angled side edges to allow flush fitting joints between units, eliminating gaps and possible dirt traps.
- Cooking surface 2/3 smooth and 1/3 ribbed.

#### **Included Accessories**

- 1 of Scraper for smooth plate fry PNC 164255 tops
- of 1 of Scraper for ribbed plate fry PNC 206420 tops kit includes knife blades for both smooth and ribbed surface

# **Optional Accessories**

• Scraper for smooth plate fry tops	PNC 164255	
<ul> <li>Junction sealing kit</li> </ul>	PNC 206086	
<ul> <li>Support for bridge type installation, 800mm</li> </ul>	PNC 206137	
<ul> <li>Support for bridge type installation, 1000mm</li> </ul>	PNC 206138	
<ul> <li>Support for bridge type installation, 1200mm</li> </ul>	PNC 206139	
<ul> <li>Support for bridge type installation, 1400mm</li> </ul>	PNC 206140	
<ul> <li>Support for bridge type installation, 1600mm</li> </ul>	PNC 206141	

#### APPROVAL:






# Modular Cooking Range Line 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate


• 2 panels for service duct for single installation (only for 391177)	PNC 206181	
• Chimney upstand, 800mm (only for 391074)	PNC 206304	
Back handrail 800 mm	PNC 206308	
Back handrail 1200 mm	PNC 206309	
<ul> <li>Grease/oil kit container for 700 line frytops (half and module) and 900 line frytops (module)</li> </ul>	PNC 206346	
• Chimney grid net, 400mm (700XP/900)	PNC 206400	
Scraper for ribbed plate fry tops - kit includes knife blades for both smooth and ribbed surface	PNC 206420	
Cloche for fry tops	PNC 206455	
• Side handrail-right/left hand (900XP)	PNC 216044	
• Frontal handrail, 800mm	PNC 216047	
• Frontal handrail, 1200mm	PNC 216049	
• Frontal handrail, 1600mm	PNC 216050	
Water drain for full module fry tops	PNC 216153	
<ul> <li>Large handrail - portioning shelf, 800mm</li> </ul>	PNC 216186	
<ul> <li>2 side covering panels for top appliances</li> </ul>	PNC 216278	






## **Modular Cooking Range Line** 900XP Full Module Electric Fry Top, Smooth and Ribbed Polished Chrome Plate

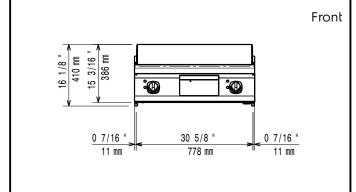



Electrical inlet (power) EQ Equipotential screw

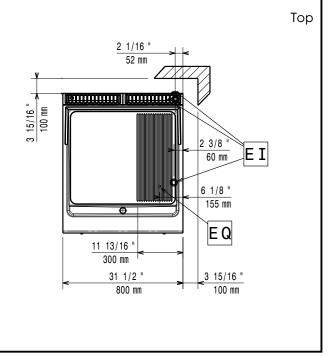

### **Electric**

Supply voltage:

391074 (E9FTEHCP00) 380-400 V/3 ph/50/60 Hz 391177 (E9FTEHCPON) 230 V/3 ph/50/60 Hz

Electrical power max.: 15 kW **Total Watts:** 15 kW

Predisposed for:

380-400V 3~ 50/60Hz

391074 (E9FTEHCP00) 13.5-15kW

## **Key Information:**

Cooking surface width: 730 mm Cooking surface depth: 700 mm Working Temperature MIN: 120 °C **Working Temperature MAX:** 280 °C External dimensions, Width: 800 mm 930 mm External dimensions, Depth: 250 mm External dimensions, Height: Net weight:

391074 (E9FTEHCP00) 88 kg 391177 (E9FTEHCPON) 105 kg

Shipping weight:

391074 (E9FTEHCP00) 99 kg 391177 (E9FTEHCPON) 120 kg 540 mm Shipping height: 1020 mm Shipping width: 860 mm Shipping depth: 0.47 m<sup>3</sup> Shipping volume:

Certification group:

391074 (E9FTEHCP00) EFT92 391177 (E9FTEHCPON) N9RE1

If appliance is set up or next to or against temperature sensitive furniture or similar, a safety gap of approximately 150 mm should be maintained or some form of heat insulation fitted.







